



PANEL INSTALLATION SHOWN

Mortar: Western Type - S

Joint Type: raked

Size - 11 5/8" x 23 5/8" thermalled finish



CUT STONE

MILL CREEK
CUT STONE

GEOLOGY

dolomitic limestone - quarried in USA

COLOR RANGE

light buff to light gray, mottled - may have shades of pink when thermalled

CONSISTENCY BLOCK/SLAB

somewhat consistent

WEIGHT CALCULATED IN INCHES

$l \times w \times h / 1728$ (inches cubed) $\times 176 =$
approx 176 pounds per cubic foot

ASTM TESTING DATA

MILL CREEK C97

water absorption—0.51%

density—172.6 pcf

MILL CREEK C99

modulus of rupture

perpendicular —2,280 psi

modulus of rupture

parallel —860 psi

MILL CREEK C170

compressive strength—28,100 psi

MILL CREEK C880

flexural strength—1,580 psi

THERMALLED



ARCHITECT/DESIGNER INFO

BIM DETAILS - SCAN
Revit, Hatch Patterns,
Seamless Textures,
3-Part Specs, DWGS,
SDS, Warranty




CUT STONE
MILL CREEK
CUT STONE

BRUSHED



BUSHHAMMERED

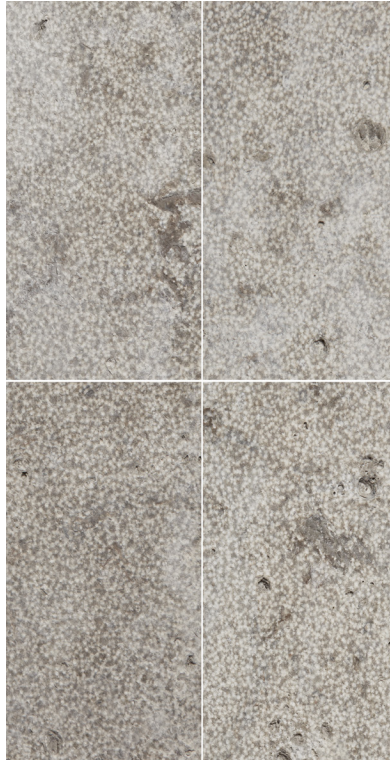

SANDBLASTED



VELOUR



SANDED



BURNISHED



www.buechelstone.com